



# PLID WRAP<sup>®</sup> ANTI-CORROSION TAPE

## RECOMMENDED USES

- Piping and pipelines
- Fittings, flanges and valves
- Pilings and pier structures
- Splash zones
- Structural steel and support bases
- Repair patch wall corners and other problem areas
- Combat corrosion under insulation (CUI)

**EASY-TO-APPLY.  
NO PRIMER PASTE  
REQUIRED.**



## ADVANTAGES

- Outlasts the leading competitor in ASTM B117-18 Salt Spray Testing
- Simple one-step application process
- Non-hazardous, non-toxic and eco-friendly
- Can be applied to wet surfaces
- Wide range of operating temperatures
- Polar bonds to all dissimilar metals
- Dielectric strength, shuts down electrolysis
- Can be used to patch problem areas
- Available in custom colors and widths



After 1000 hrs of ASTM B117-18 Salt Spray Test



1-888-617-7758  
[www.ship-2-shore.com](http://www.ship-2-shore.com)

*Tough on rust. Gentle on the environment.*



SCAN THE QR CODE WITH YOUR  
PHONE CAMERA TO LEARN MORE

## APPLICATIONS

### Above Ground:

Use on metal pipes, flanges, valves, fittings, bases of structures, plumbing connections, hydraulic hose fittings, cable splices, battery terminals, threaded connectors, trailer axles and U-bolts. Works on dissimilar metals.

### Below Ground and Under water:


Ideal for below ground piping, pipelines, structural metal, support bases and H-piles. Protects submarine pipelines, piping systems, under decking piping, offshore platforms, pilings and pier structures.

### Patch Problem Areas:

Available in custom colors and widths. Use to patch rust in problem areas such as wall corners. Adheres to all metal surfaces. Stops rust in its tracks.

## ACCESSORIES

S2S offers several specialized overwraps for use with PLID Wrap anti-corrosion tape in below ground, under water and salt spray applications, when needed.

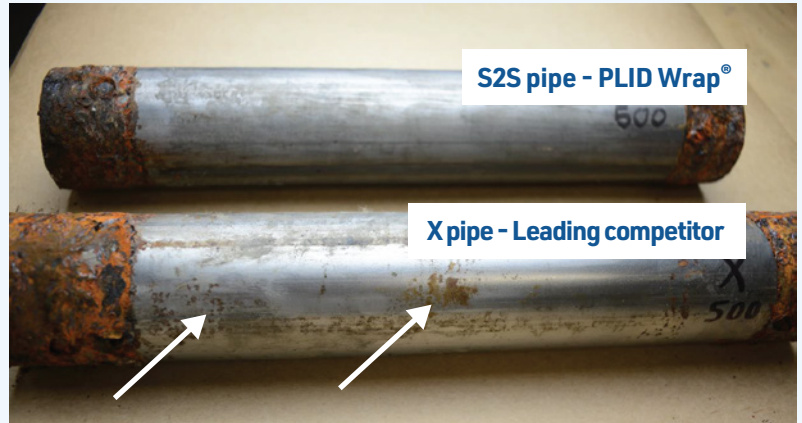

Evidence of corrosion on X-pipe after 500 hrs of ASTM B117-18 Salt Spray Test

**S2S PLID Wrap®** is an industrial tape infused with an S2S high performance, long lasting rust inhibitor. Unlike petrolatum tapes that require surface preparation and primer paste, S2S is a simple, one-step application process.

Simply apply to desired surface, even over existing rust and paint. The infused rust inhibitor creates a long lasting, protective barrier that penetrates into pitting corrosion. Leaves a pliable waxy finish that conforms to irregular shapes and does not sag.

Available in 2", 4", 6" and other custom widths and colours.

